

## Led-Atomant, S.L.

Severo Ochoa, 29 Bajo B  
15008 A Coruña España - Spain  
Tfn. 981 121 227 881 991 534  
www.led-atomant.com atomant@led-atomant.com


### PANEL REDONDO SLIM 18W

REF: 158


<b>Potencia / Input Power :</b>	18W
<b>Voltaje / Voltage:</b>	AC85-265V
<b>Conexión / Connection:</b>	CABLE
<b>Frecuencia/ Frequency:</b>	50/60Hz
<b>Factor Potencia / Power Factor:</b>	>0,57
<b>Angulo apertura / Beam Angle:</b>	120º
<b>Lumenes / Output lumen:</b>	1.350LM
<b>Temperatura Color / Color Temp:</b>	6000K
<b>IRC / CRI:</b>	>80
<b>Fuente led / Led Chip:</b>	90 PCS SMD 2835
<b>Protección IP / IP Protection:</b>	IP44
<b>Vida útil / Life Time:</b>	40.000h
<b>Material / Material:</b>	ALU. COB. TRASLUCIDA
<b>Dimensiones/ Dimensions:</b>	225Ømm X 13mm
<b>Temp. Función / Operat Temp:</b>	-20 + 40 ºc
<b>Certificaciones / Certifications:</b>	ROHS CE
<b>Garantía/ Warranty :</b>	2 Años




### DISTRIB. LUZ / DISTRIBIT. LIGHT

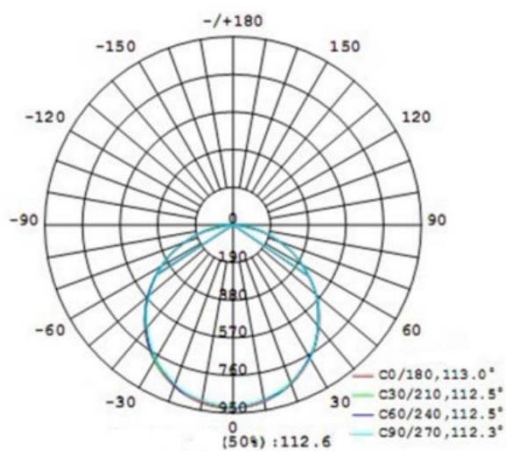

### FOTOMETRIA/PHOTOMETRIA

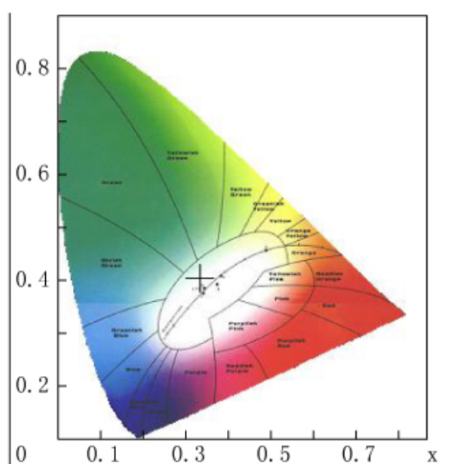

### DIMENSIONES / MEASURES

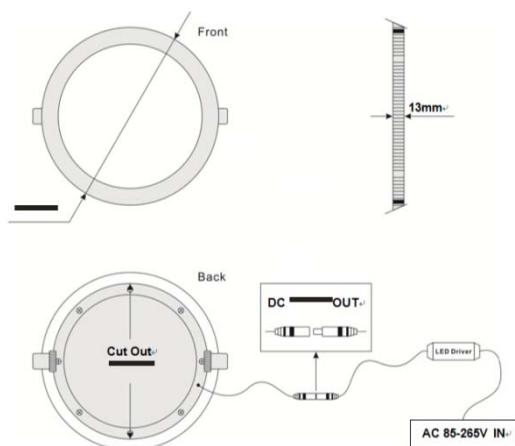

### CONO ILUMINACION/CONE LIGHTING

Distancia	Díámetro	Lux	m²
1m	3.5	429.7	9.4
2m	6.9	108.4	37.7
2.5m	8.7	68.8	58.9
3m	10.4	47.8	84.9
3.5m	12.1	36.1	115.4